



Mx=50 My=20 d/λ=1.50 Steering δ=90.0° Dir=9.59° BW=0.69°
Δt=500 ps Δφ=40.4° ΔA=10.0% N=1000
ΔAF=-22.9%±0.9 ΔDir=0.001°±0.010 ΔBW=-0.000°±0.004

Beam amplitude jitter

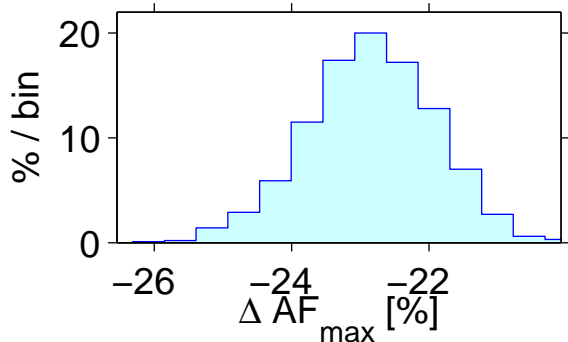

Beam direction jitter

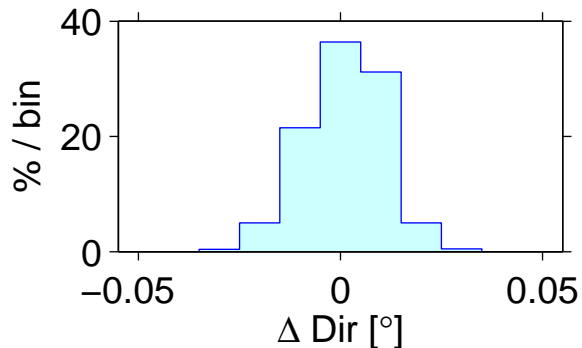

Beam width jitter

